


EN182N-156-615/620/625/630/635/640W





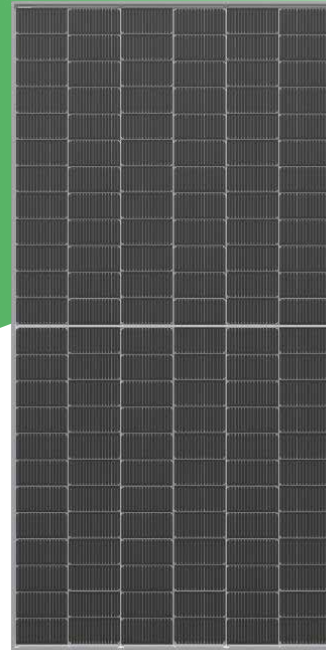

High Efficiency N-type Monocrystalline Solar Module 156 Half-Cell Series

ABOUT ECONESS ENERGY

Established in 2009, Econess Energy is engaged in PV power station development and PV module production. With current annual production capacity of 12GW modules, Econess Energy now distributes its PV products all over the world, such as Germany, Spain, Italy, France, India, Japan ect. As a strong, bankable partner, we are committed to building strategic, mutually beneficial collaboration with installers and developers.



KEY FEATURES

- 
Multi Busbar Technology
 Better light trapping and current collection to improve module power output and reliability
- 
PID Resistance
 Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.
- 
Enhanced Mechanical Load
 Certified to withstand: wind load (2400 Pa) and snow load (5400 Pa)
- 
Lower temperature coefficients
 Enhance power generation
- 
IP68 junction box
 High waterproof level
- 
High customer value
 Lower BOS cost and LCOE

SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730
- IEC 61701 / IEC 62804
- ISO 9001 : 2015 Quality Management System
- ISO 14001 : 2015 Environment Mangement System
- ISO 45001 : 2018 Occupational Health and Safety Management System




QUALITY WARRANTY

Econess Energy guarantees that defects will not appear in materials and workmanship defined by IEC61215 or IEC61730 under normal installation, use and maintenance as specified in Econess Energy's installation manual for 12 years from the warranty starting date.

PERFORMANCE WARRANTY

N-type Monocrystalline Solar Module

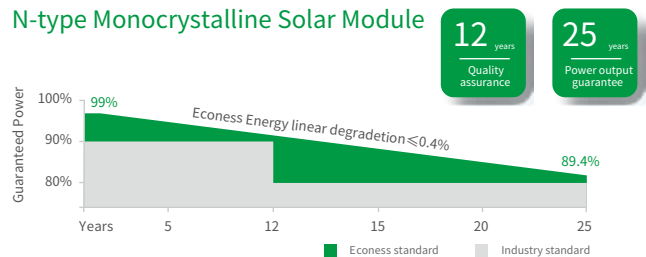

ELECTRICAL PARAMETERS

Performance at STC (Power Tolerance 0 - +5w)

Maximum Power(Pmax/W)	615	620	625	630	635	640
Operating Voltage (Vmpp/V)	46.60	46.80	47.00	47.20	47.40	47.60
Operating Current(Imp/A)	13.20	13.25	13.30	13.35	13.40	13.45
Open-Circuit Voltage (Voc/V)	55.40	55.60	55.80	56.00	56.20	56.40
Short-Circuit Current(Isc/A)	14.02	14.08	14.14	14.20	14.26	14.32
Module Efficiency ηm (%)	22.00	22.18	22.36	22.54	22.72	22.90

Performance at NOCT

Maximum Power(Pmax/W)	462	466	470	474	478	482
Operating Voltage(Vmpp/V)	44.30	44.50	44.70	44.80	45.00	45.20
Operating Current(Imp/A)	10.45	10.49	10.53	10.57	10.61	10.65
Open-Circuit Voltage(Voc/V)	52.60	52.80	53.00	53.20	53.40	53.60
Short-Circuit Current(Isc/A)	11.32	11.37	11.42	11.46	11.51	11.56


STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5

NOCT: Irradiance 800W/m², Ambient Temperature 25°C, Wind Speed 1m/s

MECHANICAL SPECIFICATION

Cell Arrangement	156 [2 x (13 x 6)]
Weight	30.2 kg(66.58 lb)
Module Dimensions	2465x 1134 x 35mm(97.05 x 44.65 x 1.38 inch)
Cable Length	300 mm (11.81 inch) or Customized Length
Cable Cross Section Size	4 mm ² (0.006 sq.in)
Front Glass	3.2 mm High Transmission, Tempered Glass
No.of Bypass Diodes	3
Packing Configuration	31pcs/Pallet,496 pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP68

I-V CURVE

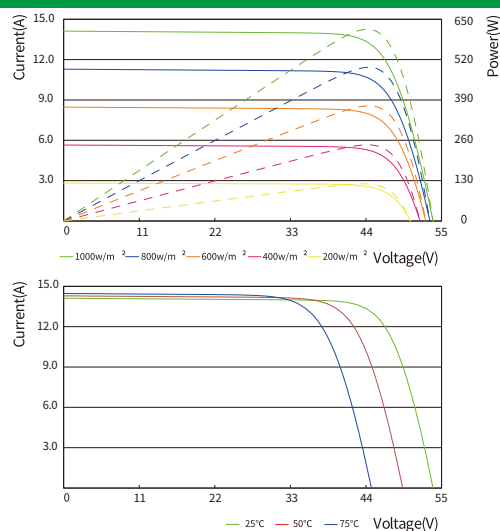

OPERATING CONDITIONS

Maximum System Voltage	1500V (IEC) DC
Operating Temp	-40°C ~ +85°C
Maximum Fuse Rating	25 A
Static Loading	5400 Pa
Conductivity at Ground	≤ 0.1Ω
Safety Class	II
Resistance	≥ 100MΩ
Connector	MC4 Compatible

TEMPERATURE COEFFICIENT

Temperature Coefficient(Pmax)	-0.30%/°C
Temperature Coefficient(Voc)	-0.25%/°C
Temperature Coefficient(Isc)	+0.046%/°C
NOCT	45 ± 2°C

TECHNICAL DRAWINGS (mm)

